




# Back


In this guide, we add the back acrylic piece.

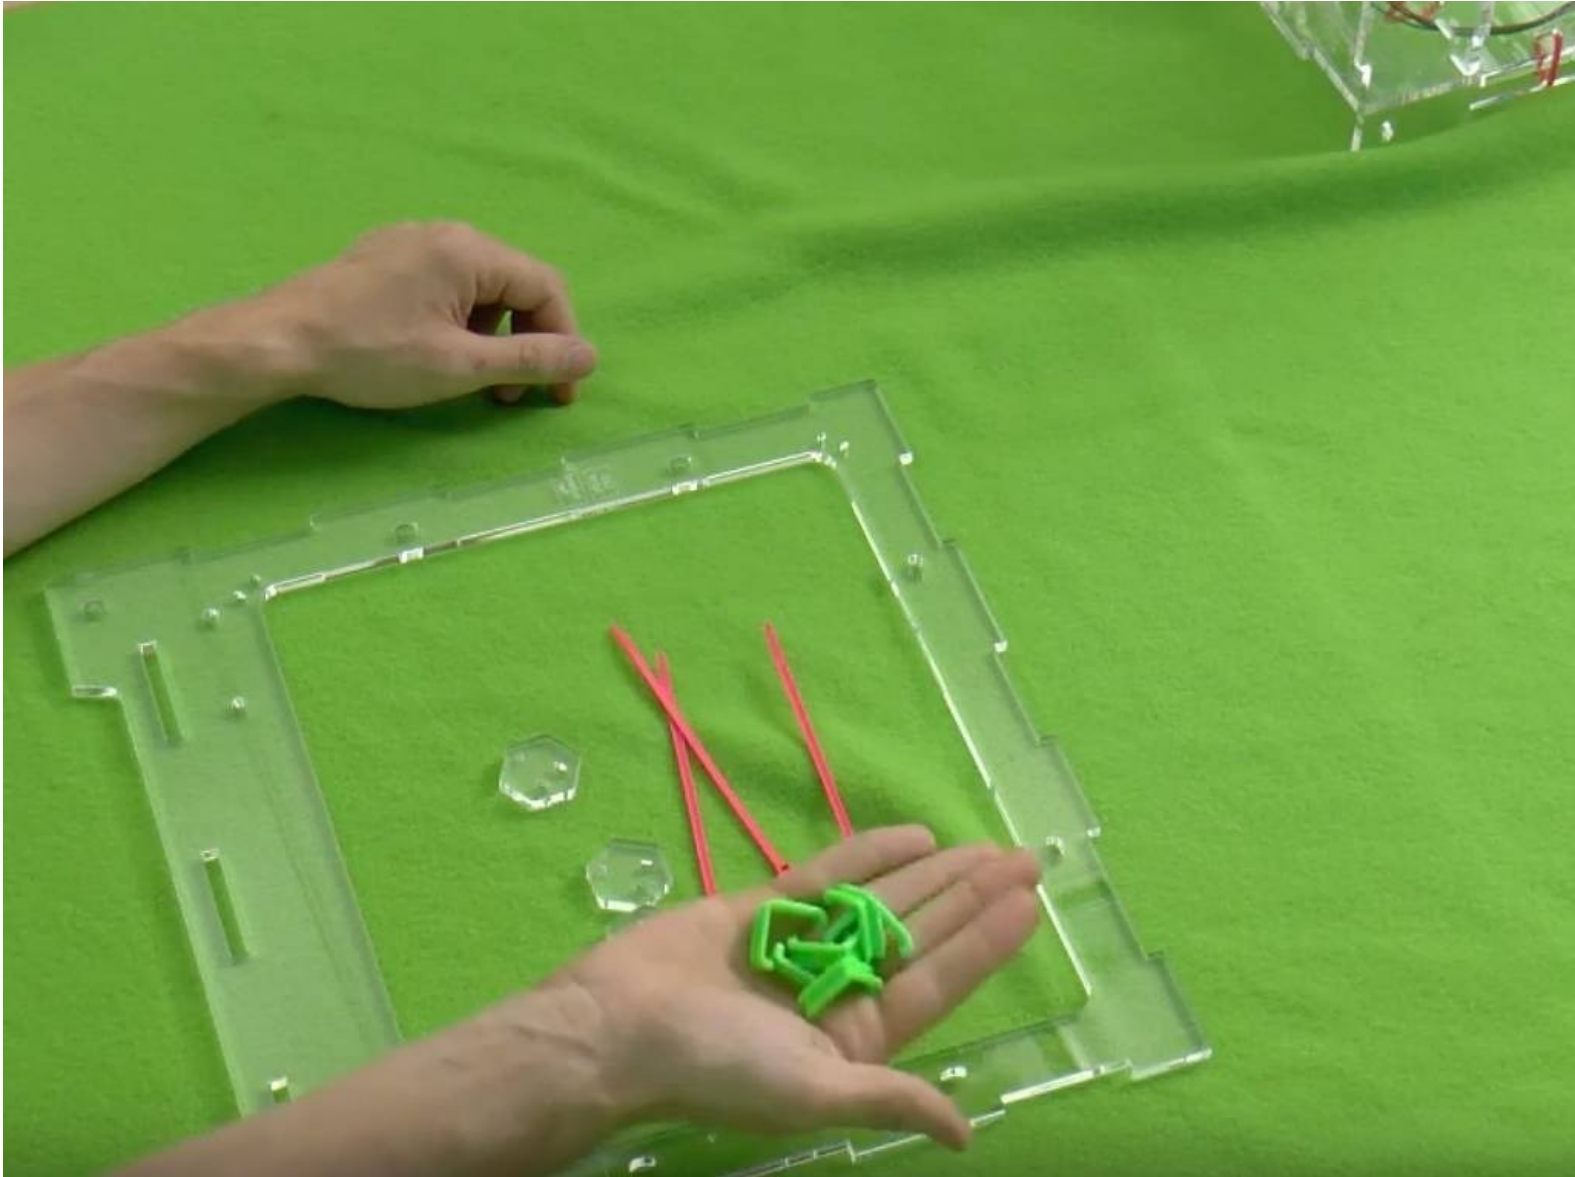

# INTRODUCTION


[video: <https://youtu.be/-Xzc08ppAQU>]

## Step 1 — You'll Need:

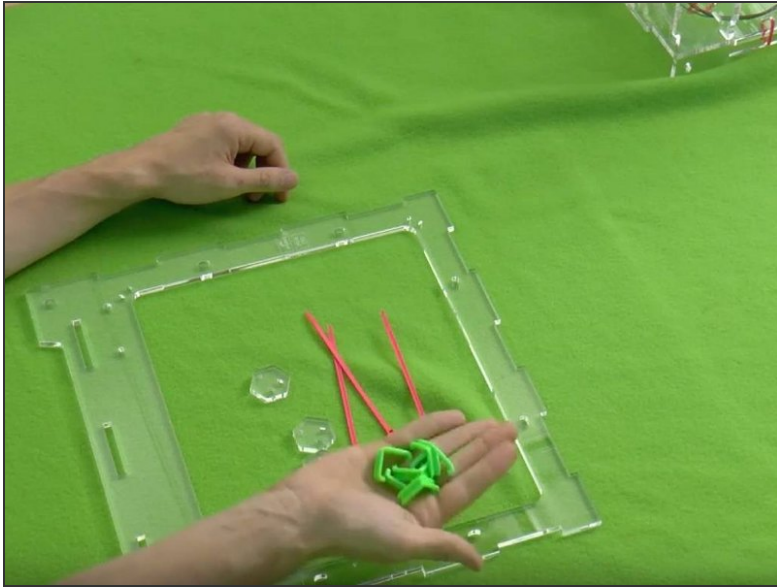


- Back acrylic piece
- Hexagonal acrylic mounts (3)
- 6" zip ties (9)
- Corner clips (6)

## Step 2 — Prepare the Hexagonal Mounts

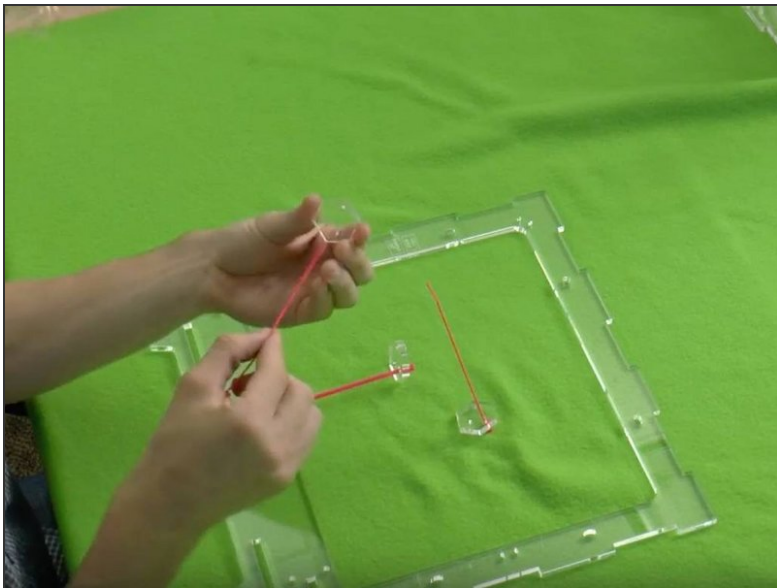


- Thread a 6" zip tie through each hexagonal mount.
- (The toothy part of the zip tie should be facing the center point of the hexagonal piece.)

### Step 3 — Attach the Hexagonal Mounts

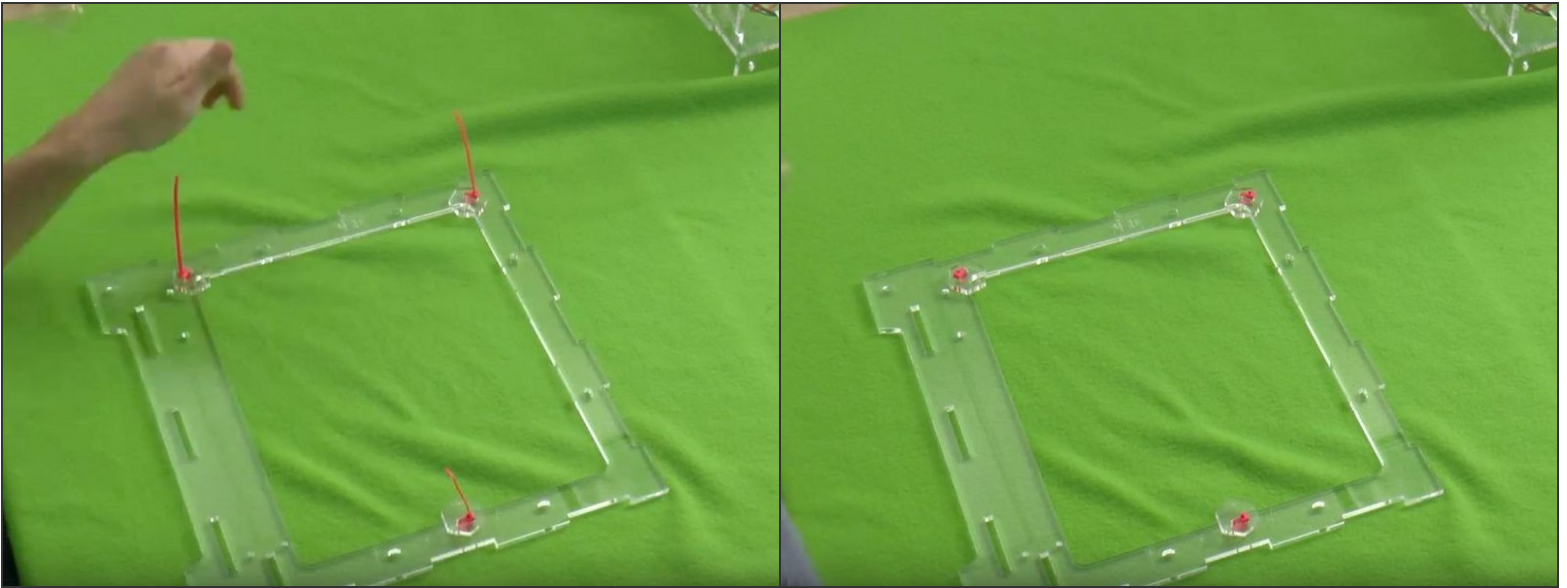


- Critical The etchings on the back piece should be on the side facing you; that is, the text should look mirrored.
- Attach the hexagonal mounts on top of the back with the zip ties.
- Two mounts go on the left: at the top and bottom.
- One mount goes at the right.

## Step 4 — Connect the Back Panel

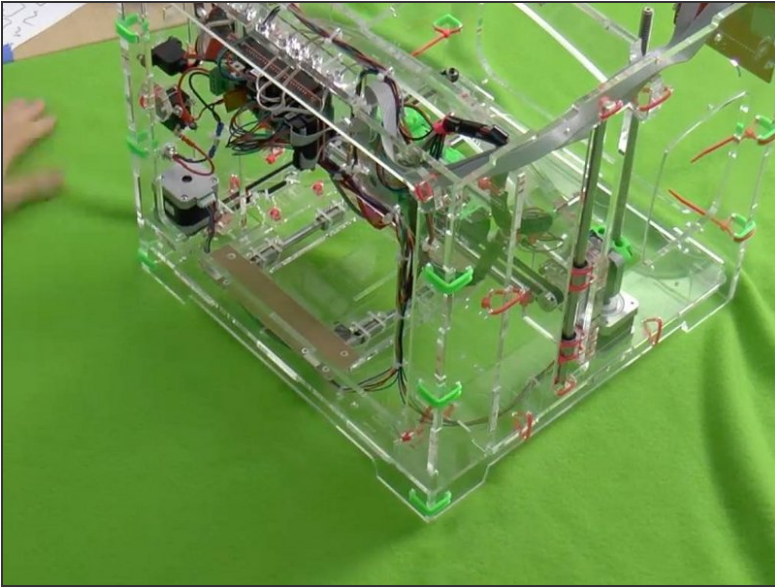

- Use the six corner clips to attach the back panel to the box.


## Step 5 — Secure the Panel

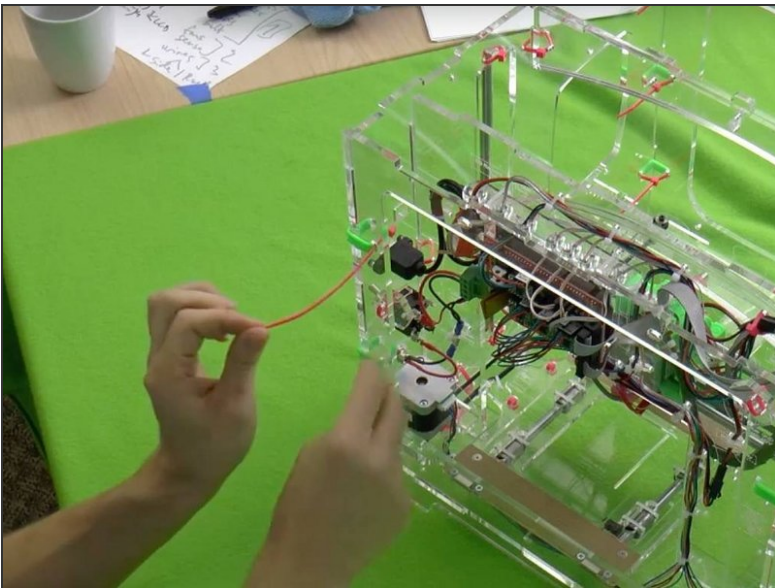

- Use the last six 6" zip ties to fix the back in place.
- Tip: Thread the ties towards you first will make it easier to tighten them.



## Step 6 — Beware of the Knob

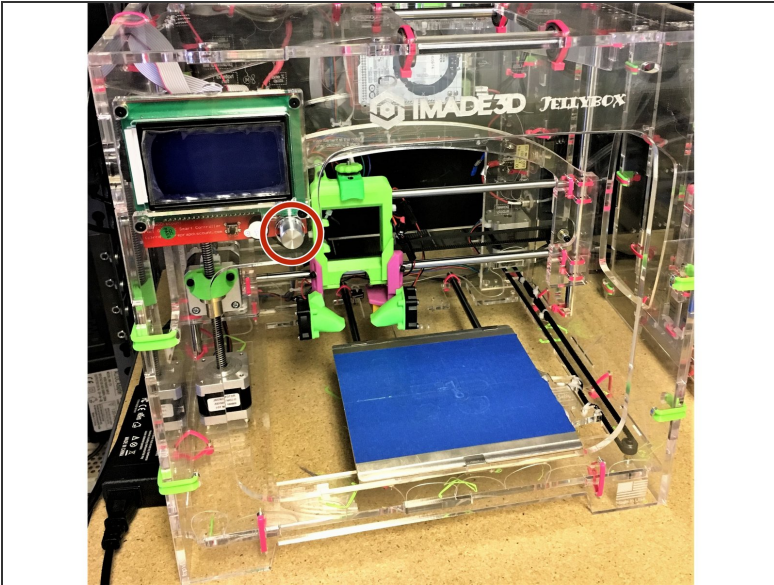

- Be careful of this knob when rotating the printer on its front for easier access.
- If it gets pushed in, it won't turn properly; to remedy this simply pull it out again with vise grip.